

### UL38-12



### Physical Specification





Part Number:	<b>UL38-12</b>
Length:	<b>197 ± 2 mm (7.76 inches)</b>
Width:	<b>165 ± 2 mm (6.49 inches)</b>
Container Height:	<b>170 ± 2 mm (6.69 inches)</b>
Total Height (with terminal):	<b>170 ± 2 mm (6.69 inches)</b>
Approx Weight:	<b>Approx 12.2kg (26.89lbs)</b>

### Specifications

	Normal Voltage	12V
	Normal Capacity (20HR)	38AH
Terminal Type	Standard Terminal	F10
	Optional Terminal	F6
Container Material	Standard Option	ABS
	Flame Retardant Option (FR)	UL94:VO
Rated Capacity	38.0 AH/1.976A	(20hr, 1.80V/cell, 25°C / 77°F)
	35.34 AH/3.8A	(10hr, 1.80V/cell, 25°C / 77°F)
	32.7 AH/6.55A	(5hr, 1.75V/cell, 25°C / 77°F)
	28.7 AH/9.89A	(3hr, 1.75V/cell, 25°C / 77°F)
	23.2AH/23.2A	(1hr, 1.60V/cell, 25°C / 77°F)
Max Discharge Current	456A (5s)	
Internal Resistance	Approx 10mΩ	
Discharge Characteristics	Operating Temp. Range	Discharge: -15 ~ 50°C (5 ~ 122°F)
		Charge: 0 ~ 40°C (5 ~ 104°F)
		Storage: -15 ~ 40°C (5 ~ 104°F)
	Nominal Operating Temp. Range	25 ± 3°C (77 ± 5°F)
	Cycle Use	Initial Charging Current less than 11.4A. Voltage 14.4V ~ 15.0V at 25°C (77°F) Temp. Coefficient -30mV/°C
	Standby Use	No limit on Initial Charging Current Voltage 13.5V ~ 13.8V at 25°C (77°F) Temp. Coefficient -20mV/°C
Capacity affected by Temperature	40°C (104°F) 103%	
	25°C (77°F) 100%	
	0°C (32°F) 86%	
Design Floating Life at 20°C	10 Years	
Self Discharge	Ultracell batteries may be stored for up to 6 months at 25°C(77F) and then a refresh charge is required. For higher temperatures the time interval will be shorter.	

### Dimensions

#### F10 Terminal



ALL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE


### Constant Current Discharge (Amperes) at 25°C (77°F)

F.V/Time	5 min	10 min	15 min	20 min	30 min	45 min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	69.8	53.6	46.2	40.1	31.1	23.5	19.1	11.5	8.79	7.21	6.14	5.38	4.35	3.66	1.96
1.80V/cell	87.3	62.7	52.5	45.1	34.1	25.4	20.4	12.3	9.26	7.55	6.41	5.61	4.53	3.80	2.00
1.75V/cell	98.4	68.4	57.4	48.3	36.6	27.0	21.6	12.8	9.54	7.74	6.56	5.72	4.59	3.84	2.01
1.70V/cell	108.4	73.9	61.3	51.3	38.2	28.1	22.5	13.2	9.82	7.93	6.71	5.83	4.66	3.88	2.03
1.65V/cell	118.6	79.6	65.1	54.3	40.1	29.4	23.4	13.5	10.1	8.09	6.84	5.93	4.73	3.92	2.06
1.60V/cell	128.6	85.7	69.7	57.1	42.0	30.6	24.3	14.0	10.3	8.26	6.96	6.02	4.79	3.97	2.07


### Constant Power Discharge (Watts) at 25°C (77°F)

F.V/Time	5 min	10 min	15 min	20 min	30 min	45 min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	132.3	102.6	89.3	78.2	61.0	46.3	37.8	22.9	17.6	14.5	12.3	10.8	8.80	7.41	3.97
1.80V/cell	164.0	119.2	100.9	87.4	66.5	49.9	40.3	24.3	18.4	15.1	12.8	11.3	9.12	7.67	4.02
1.75V/cell	183.3	129.1	109.5	93.2	71.0	52.8	42.5	25.3	18.9	15.4	13.1	11.4	9.22	7.72	4.05
1.70V/cell	200.0	138.3	116.2	98.4	73.9	54.9	44.2	26.1	19.4	15.7	13.4	11.6	9.32	7.77	4.08
1.65V/cell	216.8	147.9	122.8	103.6	77.2	57.2	45.8	26.6	19.9	16.0	13.6	11.8	9.44	7.84	4.13
1.60V/cell	232.9	158.2	130.6	108.5	80.7	59.2	47.4	27.4	20.3	16.3	13.8	12.0	9.54	7.91	4.14


### Discharge Characteristics

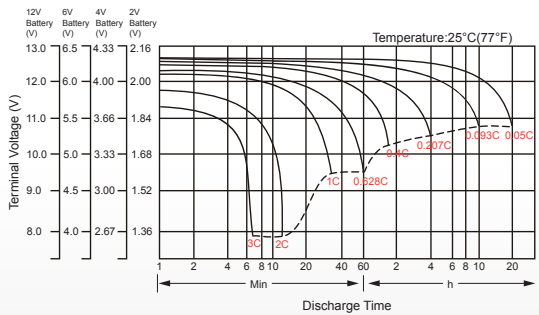

### Float Charging Characteristics

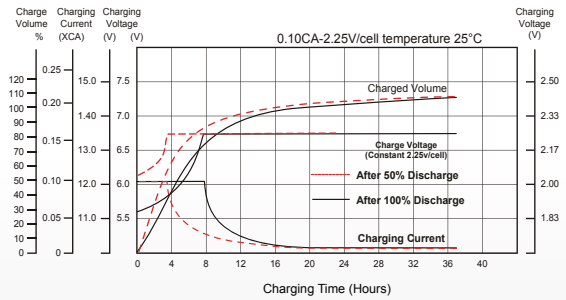


### Temperature Effects in Relation to Battery Capacity

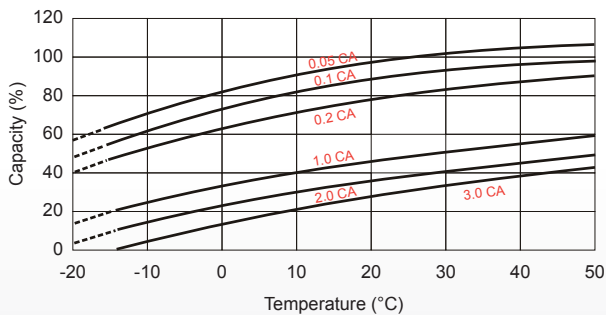


### Effect of Temperature on Long Term Float Life



### Cycle Life in Relation to Depth of Discharge

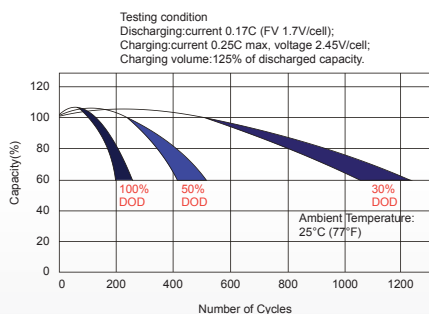

### Self Discharge Characteristics

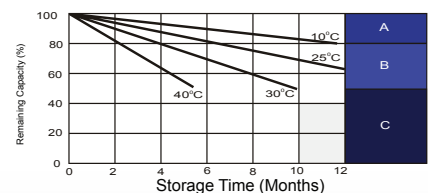

- A** No supplementary required (Carryout supplementary charge before use if 100% capacity is required.)
- B** Supplementary charge required before use. Optional charging way as below:
  1. Charged for above 3 days at limited current 0.25CA and constant voltage 2.25V/cell.
  2. Charged for above 20 hours at limited current 0.25CA and constant voltage 2.25V/cell.
  3. Charged for 8 ~ 10 hours at limited current 0.05 CA.
- C** Supplementary charge may often fail to recover the capacity. The battery should never be left standing till this is reached.

ALL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE